


VALVES

RESILIENT SEATED GATE VALVE

- Manufactured to AS/NZS 2638.2.
- Ductile Iron body and bonnet to AS 1831.
- Wedge is Ductile Iron AS 1831, fully encapsulated (Vulcanized) EPDM Rubber to AS1646 and AS681.1.
- Forged Stem: 431 Stainless Steel to ASTM A276, providing excellent corrosion and strength, reducing moving parts.
- Bolts are all 316 Stainless Steel to ASTM A276, hot melt encapsulated for superior corrosion resistance in harsh environments.
- Fusion Bonded Epoxy coated to AS/NZS 4158 provides the valve excellent corrosion protection.
- Valves are available in both Anticlockwise and Clockwise configuration. Valves are supplied with Key Cap as standard, Hand Wheel is optional.
- The wedge is designed with abrasion resistant nylon guides which reduce the required opening and closing torque through smooth operation.

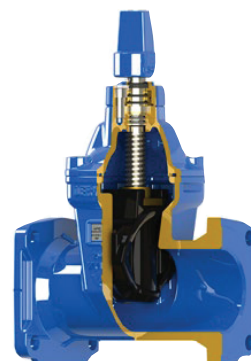

For use in Potable Water, Waste Water, Fire, Irrigation, Water Circulation and Heating and Cooling applications and are suitable for both above and below ground installation.

- Size range: DN 80-DN 600(DN50 and DN65 also available not to AS/NZS2638.2)
- Allowable Operating Pressure:1600 kPa; 1.6 Mpa
- Maximum Test Pressure: 2400 kPa, 2.4 Mpa
- Maximum Temperature: 40 Deg C
- End Connection: Flanged to AS 4087 (Table E drilling also available for DN 150 and above) Socketed, Spigoted and Roll Grooved
- Certification: SAI Global Watermark Lic. No. 25890 Standards Mark Lic. No. 25890WSAA Appraisal No. PA1511DERWENTINTERNATIONAL



Blue Cap - White plug
Water ACC Close



Red Cap - Red Plug -
Water CC Close



Lilac Cap - White plug
Recycled Water
ACC Close



Lilac Cap - Red Plug
Recycled Water
CC Close

VALVES

RSV50	Resilient Seat Gate Valve 50mm - Flanged
RSV80AS-FL	Resilient Seat Gate Valve 80mm Aust Standard - Flanged
RSV100AS-FL	Resilient Seat Gate Valve 100mm Aust Standard - Flanged
RSV150AS-FL	Resilient Seat Gate Valve 150mm Aust Standard - Flanged
RSV200AS-FL	Resilient Seat Gate Valve 200mm Aust Standard - Flanged
RSV250AS-FL	Resilient Seat Gate Valve 250mm Aust Standard - Flanged
RSV300AS-FL	Resilient Seat Gate Valve 300mm Aust Standard - Flanged
RSV375AS-FL	Resilient Seat Gate Valve 375mm Aust Standard - Flanged
RSV400AS-FL	Resilient Seat Gate Valve 400mm Aust Standard - Flanged
RSV450AS-FL	Resilient Seat Gate Valve 450mm Aust Standard - Flanged
RSV500AS-FL	Resilient Seat Gate Valve 500mm Aust Standard - Flanged
RSV600AS-FL	Resilient Seat Gate Valve 600mm Aust Standard - Flanged



VKEY900	Sluice Valve Galv 900mm T Key
VKEY900/1	Sluice Valve Galv 900mm T Key Non-galvanised
RSVHW	Hand Wheel to suit 100-300mm Sluice Valves

BLUTOP

Euro 20 - HDPE restraint

The Blutop ductile iron gate valve, is coated with blue epoxy powder (250 microns). The bolt-free pressure seal autoclave gives this product excellent resistance to corrosion. The cold-forged stainless steel screw and the gate with sliders improve its longevity by reducing friction. The bearing can be replaced under pressure, and the EURO 20® gate valve remains efficient even when it has not been in operation for a long period of time. This product is ergonomic and easy to install.

BTGV110	Euro 20 Blutop Gate Valve 110- Anticlockwise with Cap Top
BTGV125	Euro 20 Blutop Gate Valve 110- Anticlockwise with Cap Top



IZG110	Anchored Gasket for Blutop Gate Valve 110mm
IZG125	Anchored Gasket for Blutop Gate Valve 125mm

